



EV Series


MACHINE ROOMLESS

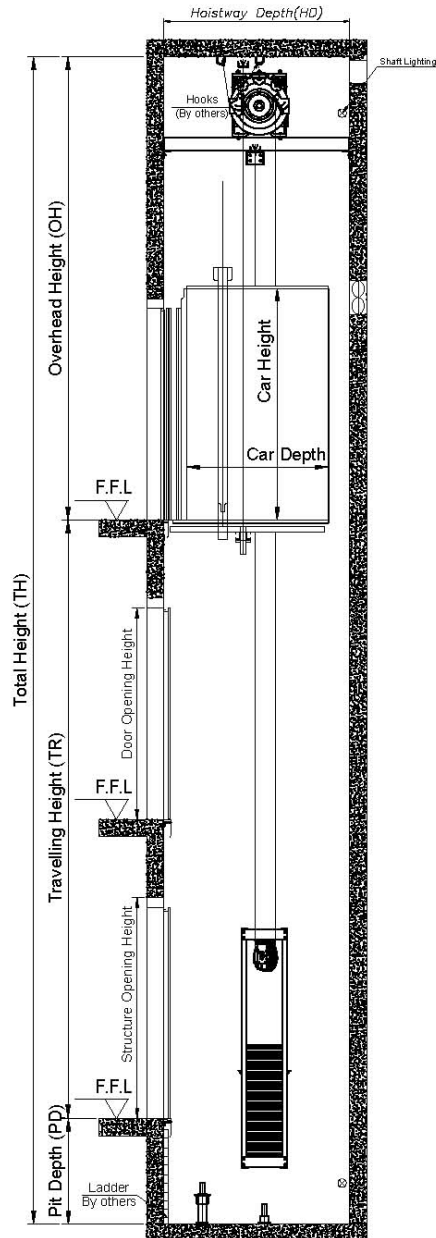


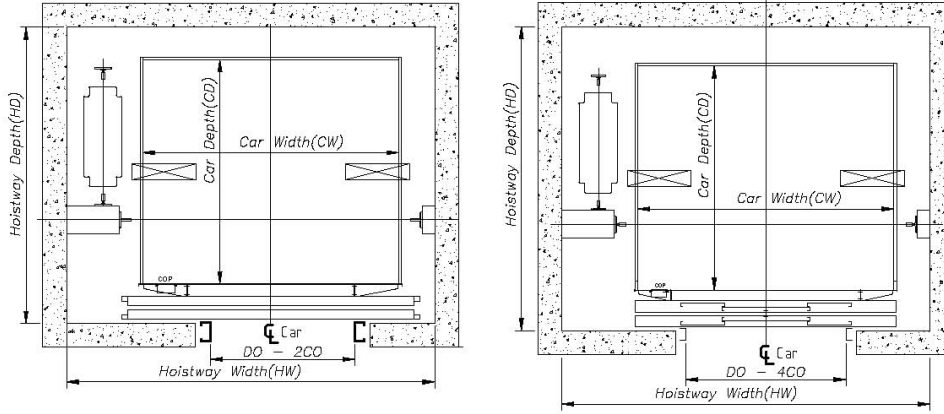


HORIZONTAL DIMENSION WIDE CAR (800 - 2000kg)

EV Series
Roping 2:1

 Product Code	Capacity		Min. Car Size CW*CD (mm*mm)		Door		Min. Shaft Size SW*SD (mm*mm)		
	Loads (kg)	No. Of Person	CW (mm)	CD (mm)	Door Type	Door Opening (mm)	SW (mm)	SD (mm)	
EV0800-W2C08	800	10	1400	1350	2CO	800	2100	1850	
EV0800-W2C09						900	2200	1850	
EV0800-W2C10						1000	2300	1850	
EV0800-W4C09						4CO	900	2100	1900
EV0800-W4C10							1000	2100	1900
EV1000-W2C09							1000	13	1600
EV1000-W2C10	1000	2400	1850						
EV1000-W2C11	1100	2500	1850						
EV1000-W2C12	1200	2600	1850						
EV1000-W4C10	4CO	1000	2300	1900					
EV1000-W4C11		1100	2300	1900					
EV1000-W4C12		1200	2350	1900					
EV1150-W2C10	1150	15	1800	1400	2CO	1000	2550	1850	
EV1150-W2C11						1100	2600	1850	
EV1150-W2C12						1200	2700	1850	
EV1150-W4C11						4CO	1100	2550	1900
EV1150-W4C12							1200	2550	1900
EV1150-W4C13							1300	2550	1900
EV1150-W4C14					1400		2600	1900	
EV1350-W2C10					1350	18	1800	1650	2CO
EV1350-W2C11	1100	2600	2000						
EV1350-W2C12	1200	2700	2000						
EV1350-W4C11	4CO	1100	2550	2100					
EV1350-W4C12		1200	2550	2100					
EV1350-W4C13		1300	2550	2100					
EV1350-W4C14		1400	2600	2100					
EV1600-W2C10	1600	21	2000	1700					2CO
EV1600-W2C11					1100	2750	2050		
EV1600-W2C12					1200	2800	2050		
EV1600-W4C12					4CO	1200	2750	2150	
EV1600-W4C13						1300	2750	2150	
EV1600-W4C14						1400	2750	2150	
EV1600-W4C15						1500	2800	2150	
EV1600-W4C16					1600	2850	2150		
EV2000-W2C10	2000	26	2000	2000	2CO	1000	2750	2350	
EV2000-W2C11						1100	2750	2350	
EV2000-W2C12						1200	2800	2350	
EV2000-W4C12						4CO	1200	2750	2450
EV2000-W4C13							1300	2750	2450
EV2000-W4C14							1400	2750	2450
EV2000-W4C15					1500		2800	2450	
EV2000-W4C16					1600	2850	2450		

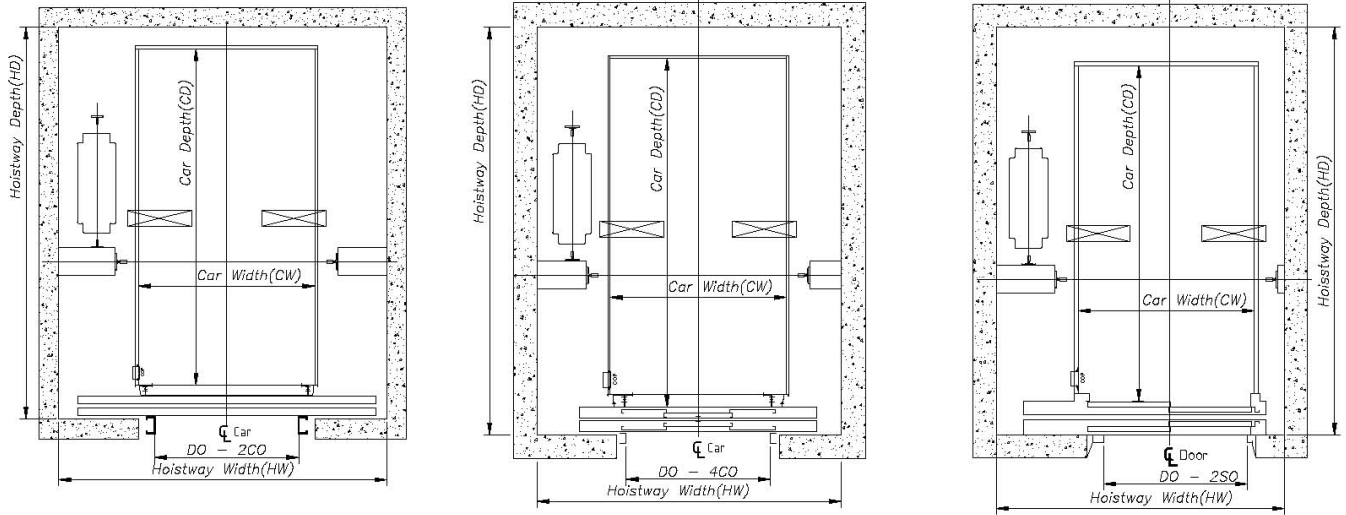


*For depth car, when $CW = DO$, no return panel.

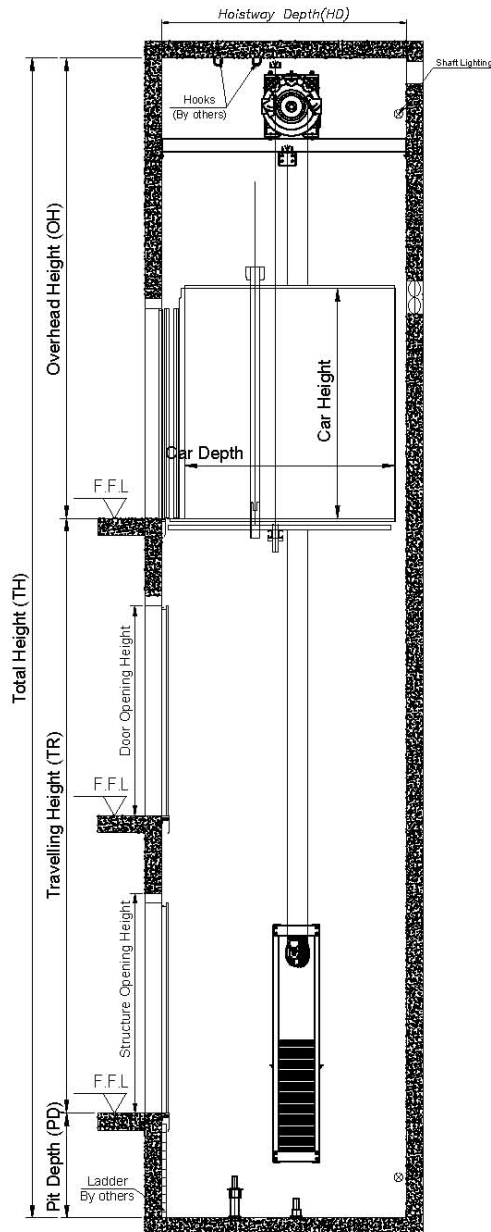

HORIZONTAL DIMENSION DEPTH CAR (630 - 1600kg)

EV Series
Roping 2:1

	Capacity		Min. Car Size CW*CD (mm*mm)		Door		Min. Shaft Size SW*SD (mm*mm)	
	Loads (kg)	No. Of Person	CW	CD	Door Type	Door Opening (mm)	SW	SD
EV0630-D2C08	630	8	1100	1400	2CO	800	1950	1850
EV0630-D2C09						900	2050	1850
EV0630-D2C10						1000	2200	1850
EV0630-D2C11						1100	2400	1750
EV0630-D4C08						800	1800	1850
EV0630-D4C09						900	1900	1850
EV0630-D4C10					1000	1950	1850	
EV0630-D4C11					1100	2050	1750	
EV0630-D2S08					800	1800	1850	
EV0630-D2S09					900	1800	1850	
EV0630-D2S10					1000	1900	1850	
EV0630-D2S11					1100	2000	1750	
EV0800-D2C08	800	10	1100	1700	2CO	800	1950	2050
EV0800-D2C09						900	2050	2050
EV0800-D2C10						1000	2200	2050
EV0800-D2C11						1100	2400	2000
EV0800-D4C08						800	1800	2150
EV0800-D4C09						900	1900	2150
EV0800-D4C10					1000	1950	2150	
EV0800-D4C11					1100	2050	2050	
EV0800-D2S08					800	1800	2150	
EV0800-D2S09					900	1800	2150	
EV0800-D2S10					1000	1900	2150	
EV0800-D2S11					1100	2000	2050	
EV1000-D2C09	1000	13	1100	2100	2CO	900	2050	2450
EV1000-D2C10						1000	2200	2450
EV1000-D2C11						1100	2400	2400
EV1000-D4C09						900	1900	2550
EV1000-D4C10						1000	1950	2550
EV1000-D4C11						1100	2050	2450
EV1000-D2S09					900	1800	2550	
EV1000-D2S10					1000	1900	2550	
EV1000-D2S11					1100	2000	2450	
EV1150-D2C10					1000	2300	2150	
EV1150-D2C11					1100	2400	2150	
EV1150-D2C12					1200	2600	2150	
EV1150-D4C10	1000	2150	2250					
EV1150-D4C11	1100	2200	2250					
EV1150-D4C12	1200	2250	2250					
EV1150-D4C13	1300	2350	2250					
EV1150-D4C14	1400	2400	2150					
EV1150-D2S10	1000	2150	2250					
EV1150-D2S11	1100	2150	2250					
EV1150-D2S12	1200	2250	2250					
EV1150-D2S13	1300	2400	2250					
EV1150-D2S14	1400	2500	2150					
EV1350-D2C10	1350	18	1400	2100	2CO	1000	2300	2450
EV1350-D2C11						1100	2400	2450
EV1350-D2C12						1200	2600	2450
EV1350-D4C10						1000	2150	2550
EV1350-D4C11						1100	2200	2550
EV1350-D4C12						1200	2250	2550
EV1350-D4C13					1300	2350	2550	
EV1350-D4C14					1400	2400	2450	
EV1350-D2S10					1000	2150	2550	
EV1350-D2S11					1100	2150	2550	
EV1350-D2S12					1200	2250	2550	
EV1350-D2S13					1300	2400	2550	
EV1350-D2S14	1400	2500	2450					
EV1600-D2C10	1600	21	1400	2400	2CO	1000	2300	2750
EV1600-D2C11						1100	2400	2750
EV1600-D2C12						1200	2600	2750
EV1600-D4C10						1000	2150	2850
EV1600-D4C11						1100	2200	2850
EV1600-D4C12						1200	2250	2850
EV1600-D4C13					1300	2350	2850	
EV1600-D4C14					1400	2400	2750	
EV1600-D2S10					1000	2150	2850	
EV1600-D2S11					1100	2150	2850	
EV1600-D2S12					1200	2250	2850	
EV1600-D2S13					1300	2400	2850	
EV1600-D2S14	1400	2500	2750					

OVERHEAD & PIT DEPTH

EV Series

EV Series		Car Height						
Speed	OH/PD	2200	2300	2400	2500	2600	2700	2800
1.0m/s	OH	3800	3900	4000	4100	4200	4300	4400
	PD	1400	1400	1400	1400	1400	1400	1400
1.5m/s	OH	3950	4050	4150	4250	4350	4450	4550
	PD	1500	1500	1500	1500	1500	1500	1500
1.75m/s	OH	4050	4150	4250	4350	4450	4550	4650
	PD	1550	1550	1550	1550	1550	1550	1550
2.0m/s	OH	5100	5200	5300	5400	5500	5600	5700
	PD	1900	1900	1900	1900	1900	1900	1900



Nippon's Machine
Roomless Series:

- MV Series Home Lift**
- EV Series**

Nippon's Machine
Room Series:

- NE Series Passenger Lift**
- NP Series Passenger Lift**



Nippon Lift Industry Sdn Bhd (790778-U)

1030 Lengkok Perindustrian Bukit Minyak 2, Kawasan Perindustrian Bukit Minyak, 14100, Penang. Malaysia

T: +60(4) 508 8833 **F:** +60(4) 508 8866 **E:** info@nipponelevator.com **W:** www.nipponelevator.com